## (12) UK Patent Application (19) GB (11) 2 275 486 (13) A

(43) Date of Printing by UK Office 31.08.1994

- (21) Application No 9407790.6
- (22) Date of Filing 22.09.1992
- (30) Priority Data (31) 913823
- (32) 30,09,1991
- (33) NO
- (86) International Application Data PCT/NO92/00157 En 22.09.1992
- (87) International Publication Data W093/07358 En 15.04.1993
- (71) Applicant(s) Wepco AS

(Incorporated in Norway)

Postboks 5015, Dusavik, N-4004 Stavanger, Norway

(72) Inventor(s)


Dag Eiane

Magne Petter Nilsen

- (51) INT CL<sup>5</sup>
  E21B 37/00 21/00
- (52) UK CL (Edition M ) E1F FGL
- (56) Documents Cited by ISA EP 0427424 A2 WO 91/14076 A1 WO 90/00668 A1
- (58) Field of Search by ISA INT CL<sup>5</sup> E21B
- (74) Agent and/or Address for Service
  Hepworth Lawrence Bryer & Bizley
  Bloxam Court, Corporation Street, RUGBY, CV21 2DU,
  United Kingdom

## (54) Circulation equipment

(57) The invention relates to a circulation equipment for the purging of predrilled oil and gas bells upon setting of casings and conductor pipes. The equipment may be designed to be suspended from the top drive of a derrick. Thereby, one has aimed at establishing a fluid-tight, easily releasable interconnection between circulation equipment. and casing/conductor pipe (29) to be circulated in connection with setting, without the use of threads. The circulation equipment having the form of an elongated pipe having a through-going bore (15), carries at the lower end thereof (with respect to the position of use) a tool head (19) exhibiting a downwardly open annulus (32) for the accommodation of the coupling piece (29') of said casing/conductor pipe (29) and, within the area of said annulus (32), a radially expandable annular packing element (22) which in expanded condition, with said pipe coupling piece (29') situated within the annulus (32), rests itself sealingly against the inner surface of the pipe coupling piece (29').

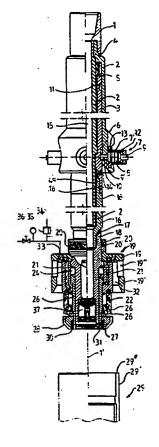

GB 2 275 486 A

THIS PAGE RI ANK MISPTON